


SE SY Series

SE2200LSYA | SE2200LSY

HYUNDAI WIA Y-Axis Turning Center

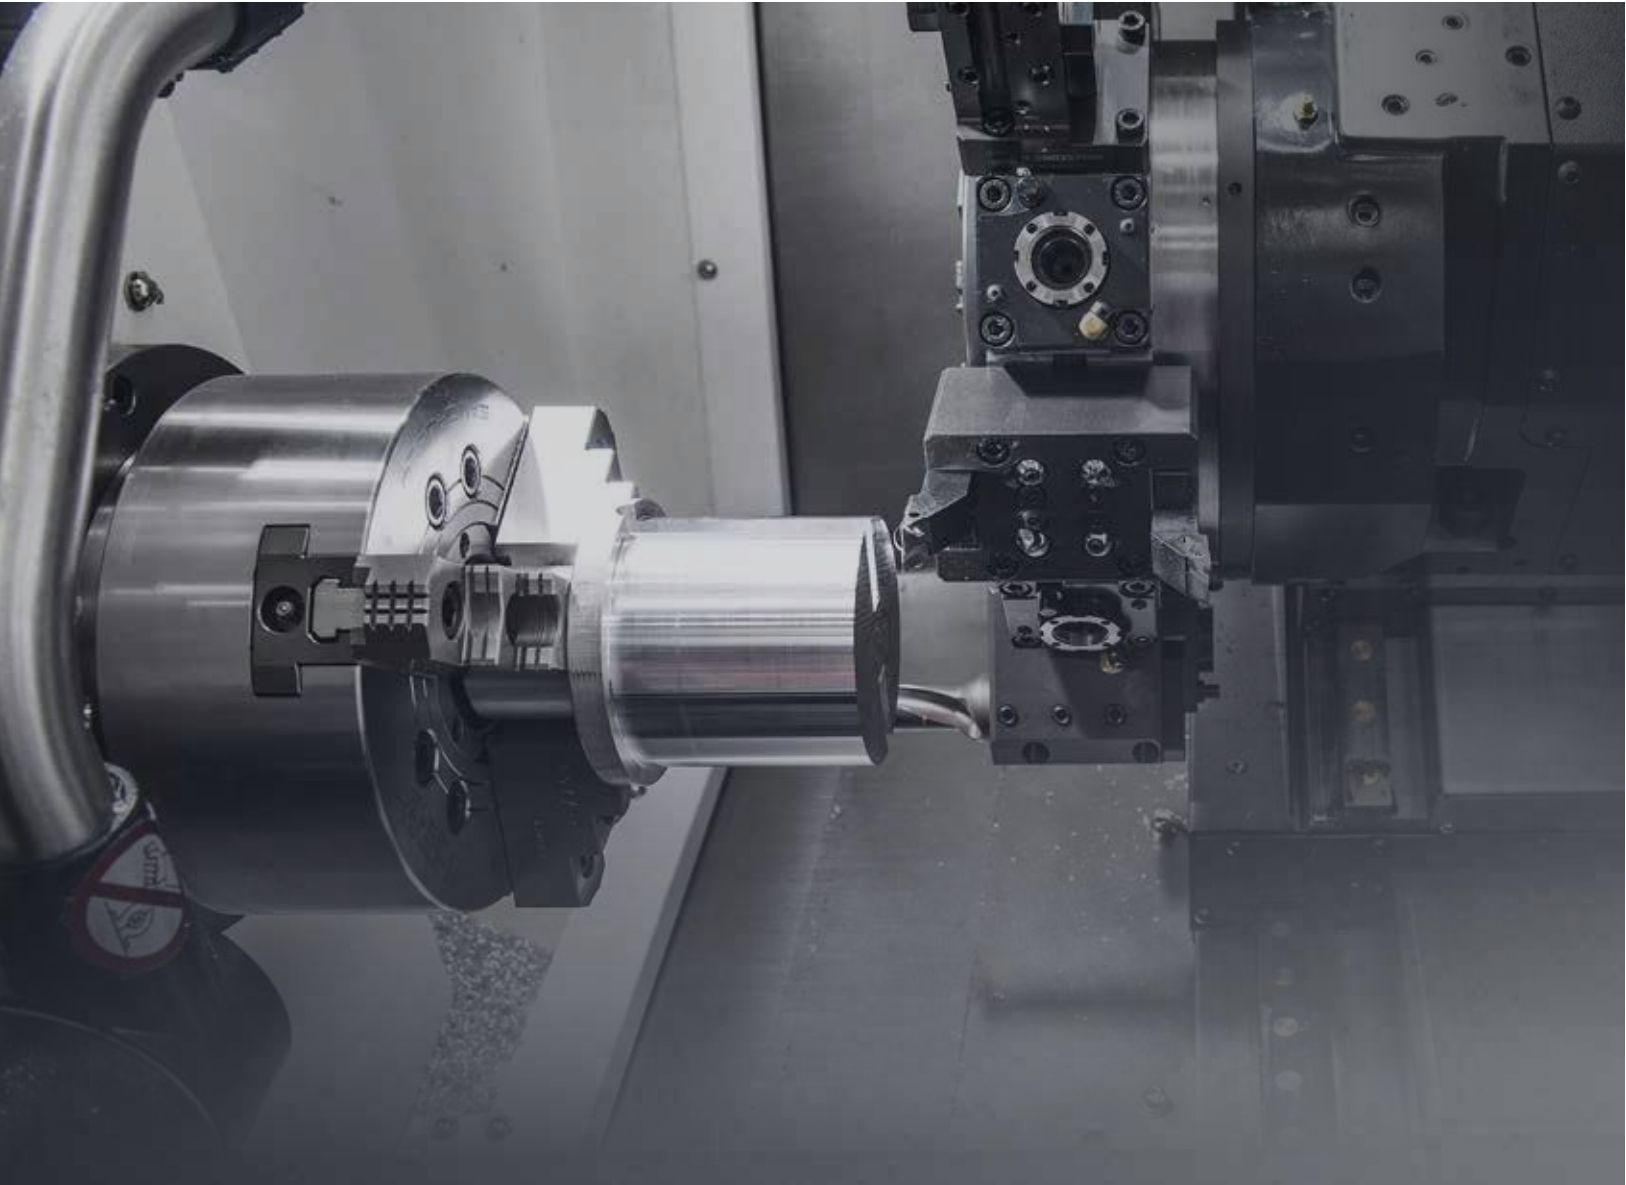

Technical Leader

The CNC Turning Center SE-SY Series, designed with HYUNDAI WIA's engineering expertise to maximize productivity by enhancing rigidity and accuracy of machining.

		SE2200LSYA	SE2200LSY
Max. Turning Dia.	mm(in)	Ø300 (Ø11.8")	
Max. Turning Length	mm(in)	529 (20.8")	508 (20")
Chuck Size	inch	Main : 6" Sub : 5"	Main : 8" Sub : 5"
Bar Capacity	mm(in)	Main : Ø51 (Ø2") Sub : Ø32 (Ø1.3")	Main : Ø65 (Ø2.6") Sub : Ø32 (Ø1.3")
Spindle Speed (rpm)	r/min	Main : 6,000 Sub : 6,000	Main : 4,500 Sub : 6,000
Spindle Motor (Max./Cont.)	kW(HP)	Main : 15/11 (20/15) Sub : 7.5/3.7 (10/5)	
Travel (X/Y/Z/ZB)	mm(in)	210/110/560/560 (8.3"/4.3"/22"/22")	
No. of Tools	EA	12 [24]	

[] : Option

SE SY Series

Excellent Machining Performance, Y-axis CNC Turning Center

- 30° slanted one-piece bed structure with high rigidity
- Stabilized unit structure to minimize thermal displacement
- Integrated processing through synchronized control of Main/Sub spindle
- Multi-tasking operation with wedge type Y-axis BMT45P turret
- Excellent rapid traverse rate (X/Y/Z) : 30/10/36 m/min (1,181/394/1,417 ipm)
- Ergonomic design for convenient access to chuck and tool




Y-AXIS TURNING CENTER



APPLICATIONS & PARTS

WORM SHAFT

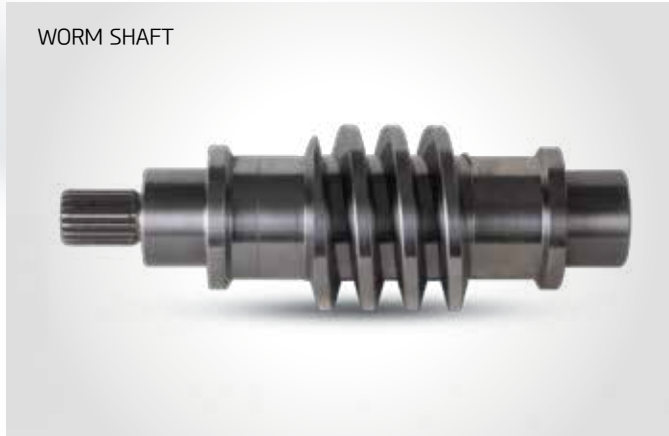

Reduced machining time by multi-tasking operation

SE-SY Series with Y-axis makes it possible to work high-valued product with integrated processing using sub spindle and various rotary tools in short time.

WHEEL
HUB



COOLING
ADAPTER



HUB
SHAFT



DRIVE
GEAR



01 BASIC STRUCTURE

Which Can Cover All Machining Process with Only One Initial Setting

Mill Turret


- BMT45P (12 [24] Station)
- 6,000 r/min
- Collet Size : $\varnothing 13$ ($\varnothing 0.51''$) {ER20}

Sub Spindle

- 5" / 6,000 r/min
- C-Axis Control : 0.001°

High Precision Spindle

- Integral body & heat dissipating RIB structure.
- SE2200LSYA (6") : 6,000 r/min
- SE2200LSY (8") : 4,500 r/min
- C-Axis Control : 0.001°

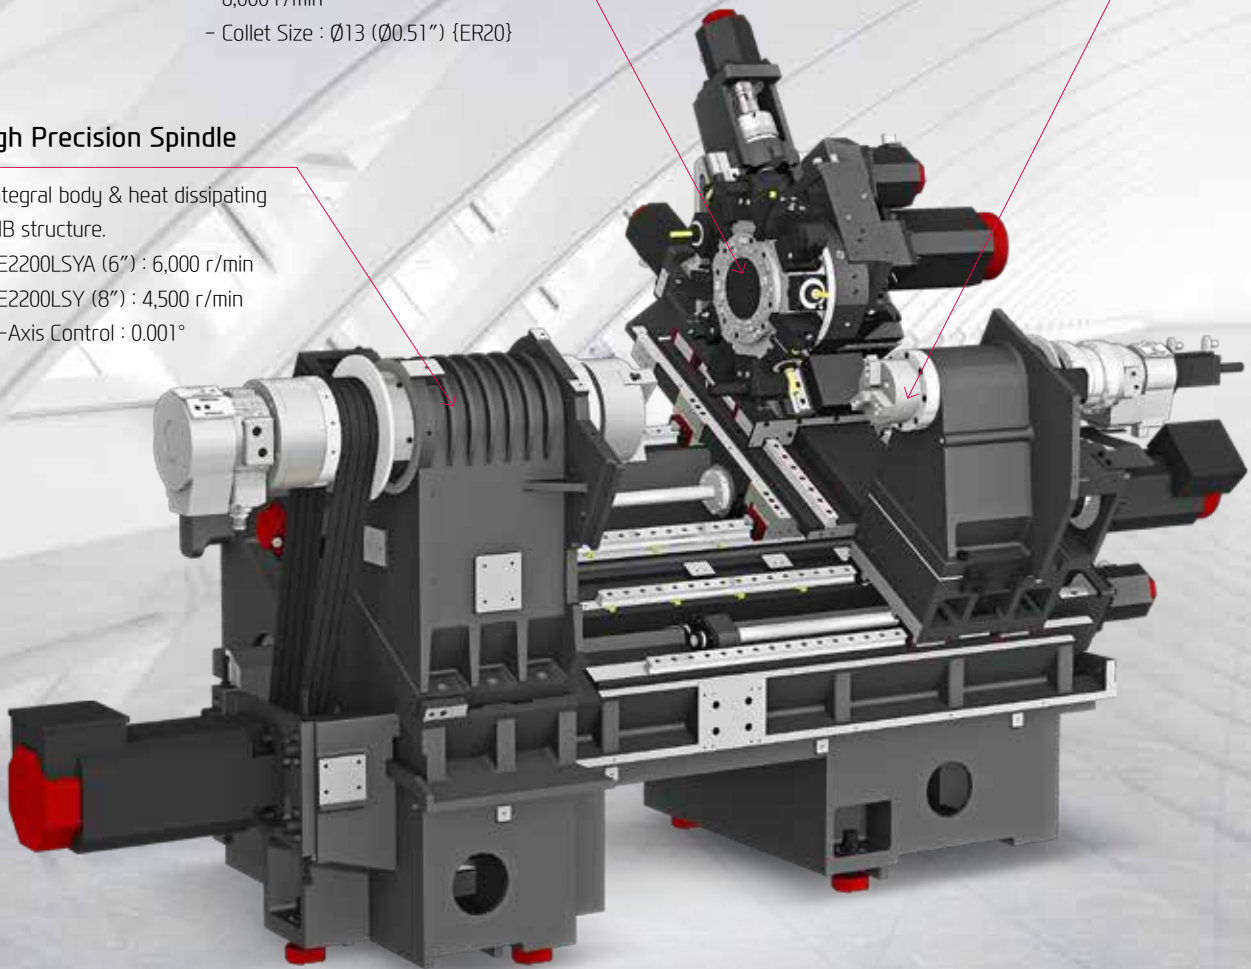

REDUCTION OF NON-CUTTING TIME BY FAST RAPID SPEED

ALL-IN-ONE TYPE OF BED

Optimal Structural Analysis


Structural analysis was applied to the design of the machine to increase the tool post body and reduce the machine's height so as to maintain the bed's dynamic rigidity even during high-speed machining.

In addition, the SE-SY Series bed slope is pitched at 30 degrees to ensure more stable machining.

Floor Space
(L×W)

2,960×1,730 mm (116.5"×68.1")

Bed Slant **30°**

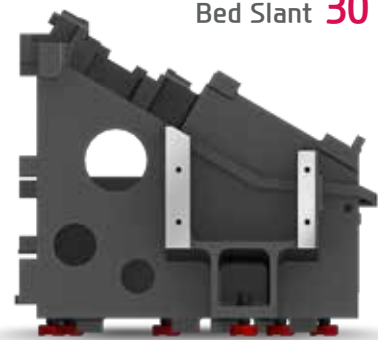


GUIDEWAY

High-Speed Roller LM Guideway

Linear roller guideways are applied to reduce non-cutting time and bring high rigidity.

Ball Screw

In order to eliminate thermal growth and increase accuracy, all axis are driven by high precision double anchored ballscrews.

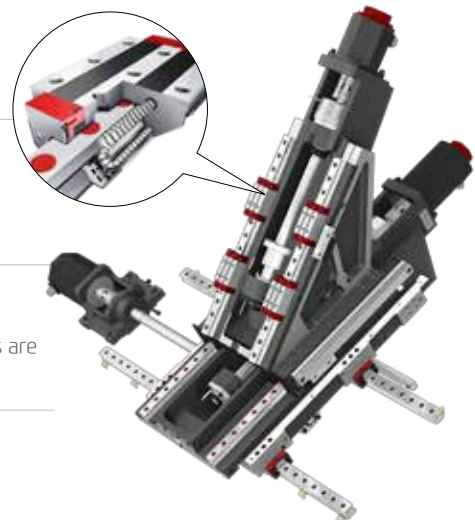

Rapid Traverse Rate (X/Y/Z/ZB)

30/10/36/15 m/min

(1,181/394/1,417/591 ipm)

Travel (X/Y/Z/ZB)


210/110/560/560 mm

(8.3"/4.3"/22"/22")


02 Y-AXIS FUNCTION

The Y-Axis Function, Cutting for Complex Shaped Work-piece


HIGH PERFORMANCE Y-AXIS




Keyway Milling




Multi-sided machining



Eccentric hole machining



X+Y axis circular interpolation



Fine Grooving




MACHINING PROCESS WITH ONLY ONE INITIAL SETTING

Y-AXIS

Wedge Type Y-Axis Structure

The SE-SY Series is designed with a wedge type Y-axis that is transferred by the simultaneous operation of the Ys-axis and the X-axis.

In addition, excellent rigidity makes it possible to perform superb quality when machining a high-accuracy machining.

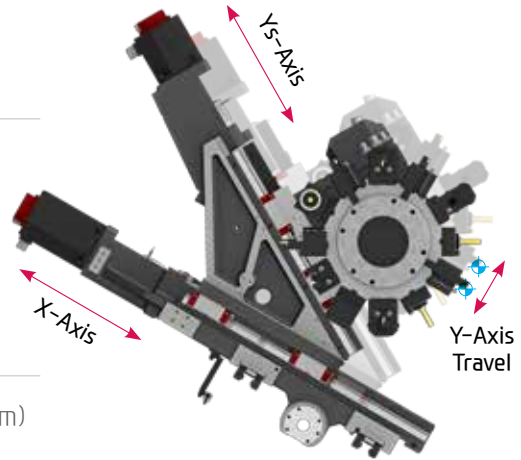

- ⦿ Y-axis Rapid Traverse Rate : 10 m/min (394 ipm)
- ⦿ Y-axis Travel : 110 {±55} mm (4.3")

MACHINING VARIATION

HYUNDAI WIA is doing its best to get the world-top class quality, productivity and technology for meeting the global customers' needs through its full R&D investment.

End Mill (Material : S45C)	
Tool Dia.	Ø12 mm
Spindle rpm	750 r/min
Forwarding speed	188 mm/min
Cutting speed	29 m/min
Machining depth	14 mm

Drill (Material : S45C)	
Tool Dia.	Ø13 mm
Spindle rpm	2,540 r/min
Forwarding speed	432 mm/min
Cutting speed	104 m/min

O.D Turning (Material : S45C)	
Machining Dia.	Ø88 mm
Machining depth	4 mm
Spindle rpm	856 r/min
Cutting speed	215 m/min
Forwarding speed	0.5 mm/rev
Chip discharging amount	430 cc/min

U-Drill (Material : S45C)	
Tool Dia.	Ø60 mm
Spindle rpm	1,011 r/min
Forwarding speed	177 mm/min
Cutting speed	191 m/min
Chip discharging amount	500 cc/min

Tap (Material : S45C)	
Tap spec.×Pitch	M14×P2.0
Spindle rpm	600 r/min
Forwarding speed	2 mm/rev
Cutting speed	23 m/min

❖ The above result might be different by types of processing circumstances.

03 HIGH PRECISION SPINDLE

Long Lasting, High Accuracy & Excellent Performance CNC Turning Center



MAX 30 A
MAX 10000
MAX 23
MAX 23
MAX 23
MAX 23


HEAVY DUTY CUTTING & HIGH ACCURACY

MAIN SPINDLE

Spindle for Heavy Cutting

The main spindle is designed with the same structure often found in larger sized machines. The combination of double cylindrical roller bearings and angular contact ball bearings leads to excellent heavy duty cutting performance.

Also, machining performance is enhanced by applying ribstar belt to minimize noise and belt slipping problems. The spindle is designed with a labyrinth structure to minimize possible bearing damage from coolant and to improve machining stability.

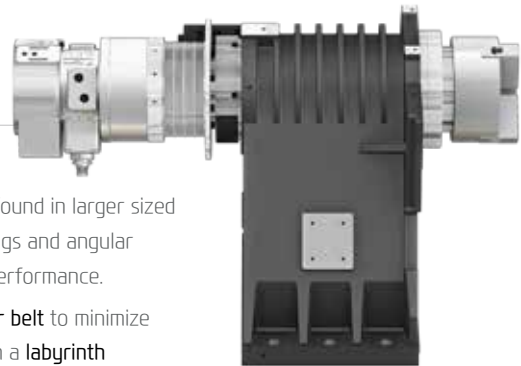

C-Axis Control

C-axis of SE-SY Series can be controlled to 0.001° which makes it possible to process various shapes.

SE2200LSYA : 6,000 rpm

15/11 kW (20/15 HP)
Output (15min/Cont.)

127/70 N·m
Torque (15min/Cont.)

SE2200LSY : 4,500 rpm

15/11 kW (20/15 HP)
Output (15min/Cont.)

167/92 N·m
Torque (15min/Cont.)

SUB SPINDLE

5" Sub Spindle

The Belt-type sub spindle with 5" chuck is designed to minimize thermal displacement during the continuous machining, offering the high-speed machining.

6,000 rpm

7.5/3.7 kW (10/5 HP)
Output (15%/Cont.)

63.6/31.4 N·m
Torque (15%/Cont.)



SE-SY SERIES

04 BMT TURRET

High speed, High Accuracy, Highly Reliable Servo Turret




VARIOUS DRIVEN PRECISION BMT TOOL HOLDERS

TURRET

Mill Turret (BMT45P)

The BMT turret secures the tool with four bolts and key on the tool mounting surface of the turret, making it possible to powerfully fix the tool, ensuring high reliability in rigidity and precision.

- ⦿ Speed (rpm) : 6,000 r/min
- ⦿ Collet Size : $\varnothing 13$ ($\varnothing 0.51''$) / ER20
- ⦿ Indexing Time : 0.11 sec

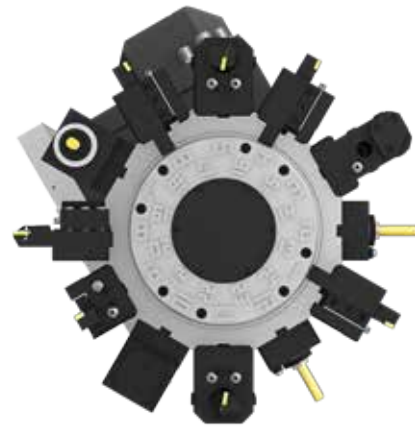

STRAIGHT MILLING HEAD



ANGULAR MILLING HEAD




Mill Tool Holder

Machining capability has increased with the addition of straight milling head tool holder, which can machine workpieces from the side, and angular milling head tool holder, which can perform I.D. operations.

SPECIAL TOOL

OPTION

With the Y-axis, the SE-SY Series can process high value-added products using a variety of rotating tools. In particular, there is a multi-holder for attaching a variety of tools to one holder, and an eccentric rotary tool for handling eccentric parts without additional axis travel, which can realize integration of process with one machine.

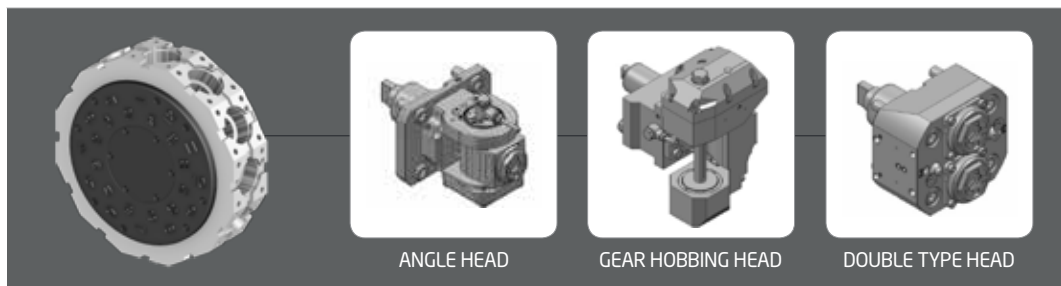

ANGLE HEAD

GEAR HOBBING HEAD

DOUBLE TYPE HEAD

❖ Consultation needed when ordering these options.

05 USER CONVENIENCE

Various Devices for User Friendly

BAR FEEDER SYSTEM

Bar Feeder

Bar feeder system enables automation which leads to efficiency improvement.

Long Type	: 3 m (118.1")	Short Type	: 1.5 m (59.1")
Bar Capacity	: Ø42 (1.7")	Bar Capacity	: Ø65 (2.6")



Parts Catcher

An optional parts catcher collects finished parts without the need to open the door, adding productivity, especially when a bar feeder is attached.



Auto Door

Using M-code, the doors can be automatically opened and closed which brings productivity and convenience for automation.



Parts Conveyor

The parts conveyor transfers the finished workpiece unloaded by the parts catcher for user convenience.



Auto Shutter

Using auto shutter, automation system with gantry loader is possible without opening the machine's door.

HIGH PRECISION SYSTEM



Automatic Q-Setter

Cutting tools are calibrated quickly and accurately with the addition of a q-setter. Each tool tip is touched off manually using a sensor that inputs the position automatically.



Linear Scale

Linear scales increase positioning accuracy and reduce distortion caused by thermal growth, thus ensuring a more accurate finished part



Work Probe

Workpiece coordinate values can be set automatically using the optional spindle probe.

Optional

CHIP DISPOSAL SOLUTION

Chip Conveyor

Timely and effective disposal of chips will enhance productivity as well as the working environment.



Hinge	Chip Type : Roughing Chip, Long Chip, Chip complex	Material : SS41, 45C, Cast Steel	Front-Right Direction
	Highly efficient when disposing a lot of chips. Capable of handling stringy chips..		
Scraper	Chip Type : Finely broken chip blown out	Material : cast Iron, Nonferrous	
	Convenient for shortly cut chips.		
❖ Screw	Chip Type : The lower portion of micro-chips	Material : Steel, Casting	
	Compresses and ejects chips to reduce chip Trouble.		
❖ Drum Filter	Chip Type : Powder, Micro Chip	Material : AL	
	Advantageous in precision, as the chips do not flow in to the coolant nozzle.		

❖ When ordering a screw or drum filter chip conveyor, prior consult with hyundai wia's sales person.

COOLANT UNIT & ECO SYSTEM



Standard Coolant (Nozzle)




Chuck Coolant (Upper Chuck)



Chuck Air Blow (Upper Chuck)



Air Gun

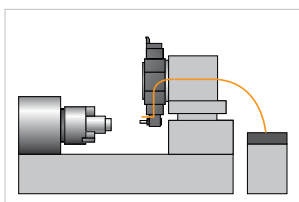

MQL : Minimal Quantity Lubrication



Oil Skimmer



Mist Collector



Grease Lubrication Device

06 HYUNDAI WIA FANUC – SMART PLUS

The Compatible All-round Control



15" Touch-type Monitor as a standard



- Fast Cycle Time Technology
- Smart Machine Control
- Smart Servo Control Technology
- Conversational Program
- SmartGuide-i
- i-HMI
- Machining-aid Function
- Part Program Storage
- 5120M (2MB)
- No. of Registerable Programs
- 1000 EA

SMART SOFTWARE



SUPPORTS SHORTCUTS

The energy-saving mode and optimization function can be used right away.



1. Dialogue Program (Smart Guide-i)

This software offers the maximum user convenience through dialogue manipulation from setup to processing. This includes writing processing programs and simulation checks.

2. Tool Monitoring (HW-TM)

This tool status monitoring software monitors and protects workpiece, tools, and equipment through real-time monitoring of the motor load from machining.

3. Thermal Displacement Compensation (HW-TDC)

This software improves processing precision by minimizing thermal deformation from changes in external environments and machining.

4. Machine Guidance (HW-MCG)

This software offers various user convenience functions such as tool manipulation, maintenance, tool monitoring, and a pop-up/status window.

5. Linear Position Sensor (HW-LPS)

This control software for displacement sensor type material clamps is capable of operating tools with setup alone, eliminating the need to change the location of clamp sensors for various workpiece.

6. Tailstock Operation (HW-TMS)

This software is capable of manipulation and data management of tailstock operations through intuitive GUI.

7. Manual Viewer

This software enables users to view electronic manuals right from the tool (Only in iHMI tools)

8. Premium Tool Operation

This software offers premium graphic functions for more intuitive tool operation (Only in iHMI tools)

9. Operation Memo

This software is capable of managing customer notes such as tool information and issues (Only in iHMI tools)

10. Scheduling

This software enables viewing/setting up directly from the tool. This allows such actions as managing customer's tool schedules and schedule notification (Only in iHMI tools)

SPECIFICATIONS

Standard & Optional


		SE2200LSYA	SE2200LSY
Spindle			
Main Spindle	6"	●	-
Hollow Chuck 3 Jaw	8"	-	●
Main Spindle	6"	-	-
Solid Chuck 3 Jaw	8"	-	-
Sub Spindle	5"	●	●
Hollow Chuck 3 Jaw			
Sub Spindle	5"	-	-
Solid Chuck 3 Jaw			
Standard Soft Jaw (1set)		●	●
Chuck Clamp Foot Switch		●	●
2 Steps Hyd. Pressure Device		○	○
Spindle Inside Stopper		☆	☆
Cs-Axis (0.001")		●	●
Chuck Open/Close Confirmation Device		○	○
2 Steps Chuck Foot Switch		○	○
Turret			
Tool Holder		●	●
Mill Turret	BMT	●	●
	12 Tool	●	●
	24 Tool	○	○
Straight Milling Head (Axial)	Collet Type, 2ea	●	●
Angular Milling Head (Radial)	Collet Type, 2ea	●	●
Straight Milling Head (Axial)	Adapter Type	○	○
Angular Milling Head (Radial)	Adapter Type	○	○
Boring Sleeve		●	●
Drill Socket		○	○
U-Drill Cap		●	●
O.D Extension Holder	For Out-Dia	-	-
Angle Head		☆	☆
Tail Stock & Steady Rest			
Quill Tail Stock	MT#4	-	-
	MT#5	-	-
Built-in Tail Stock		-	-
Programmable Tail Stock		-	-
Manual Hyd. Steady Rest		-	-
Standard Live Center		-	-
High Precision Live Center		-	-
2 Steps Tail Stock Pressure System		-	-
Quill Forward/Reverse Confirmation Device		-	-
Tail Stock Foot Switch		-	-
Coolant & Air Blow			
Standard Coolant (Nozzle)		●	●
Chuck Coolant (Upper Chuck)		○	○
Gun Coolant		○	○
Through Spindle Coolant (Only for Special Chuck)		☆	☆
Turnmill Through Coolant		-	-
Chuck Air Blow (Upper Chuck)		○	○
Tail Stock Air Blow (Upper Tail Stock)		-	-
Turret Air Blow		☆	☆
Air Gun		○	○
Through Spindle Air Blow (Only for Special Chuck)		-	-
High Pressure Coolant	0.5Bar	●	●
	6Bar	○	○
	20Bar	○	○
	70Bar	○	○
Power Coolant System (For Automation)		☆	☆
Coolant Chiller (When selecting Sub Tank Type, Chip Conveyor)		-	-
Chip Disposal			
Coolant Tank	Right	●	●
	Rear	☆	☆
Chip Conveyor (Hinge/Scraper)	Front (Right)	○	○
	Rear (Rear)	☆	☆
Special Chip Conveyor (Drum Filter)		-	-
Chip Wagon	Standard (180 ℓ [47.5 gal])	○	○
	Swing (200 ℓ [52.8 gal])	○	○
	Large Swing (290 ℓ [76.6 gal])	○	○
	Large Size (330 ℓ [87.2 gal])	○	○
	Customized	☆	☆

● : Standard ○ : Option ☆ : Prior Consultation - : Non Applicable

		SE2200LSYA	SE2200LSY
Electric Device			
Call Light	1Color : ●	●	●
Call Light	2Color : ●	○	○
Call Light	3Color : ●	○	○
Call Light & Buzzer	3Color : ● B	○	○
Electric Cabinet Light		○	○
Remote MPG		○	○
Work Counter	Digital	○	○
Total Counter	Digital	○	○
Tool Counter	Digital	○	○
Multi Tool Counter	Digital	○	○
Electric Circuit Breaker		○	○
AVR (Auto Voltage Regulator)		☆	☆
Transformer	30KVA	○	○
	35KVA	-	-
Auto Power Off		○	○
Measurement			
Manual Q-Setter (Basic)		○	○
Manual Q-Setter (Renishaw)		○	○
Automatic Q-Setter (Renishaw)		○	○
Work Close Confirmation Device (Only for Special Chuck)	TACO	○	○
	SMC	○	○
Work Setter		○	○
Linear Scale	X axis	○	○
	Z axis	○	○
Coolant Level Sensor (Only for Chip Conveyor)		☆	☆
Environment			
Air Conditioner		○	○
Oil Mist Collector		☆	☆
Oil Skimmer (Only for Chip Conveyor)		○	○
MLQ (Minimal Quantity Lubrication)		☆	☆
Fixture & Automation			
Auto Door		○	○
Auto Shutter (Only for Automatic System)		○	○
Sub Operation Panel		☆	☆
Bar Feeder Interface		○	○
Bar Feeder (FEDEK)		☆	☆
Work Pusher (Spring Type)		○	○
Work Ejector (Pneumatic Type)		○	○
Extra M-Code 4ea		○	○
Automation Interface		☆	☆
I/O Extension (IN & OUT)	16 Contact	○	○
	32 Contact	○	○
Parts Catcher	Main SP.	○	○
	Sub SP.	○	○
Turret Work Pusher (For Automation)		☆	☆
Parts Conveyor (Required Main Parts Catcher)		☆	☆
Semi Automation System		☆	☆
Hyd. Device			
Standard Hyd. Cylinder	Hollow	●	●
Standard Hyd. Unit	35bar (507.6psi) / 20 ℓ (5.3gal)	●	●
S/W			
Machine Guidance (HW-MCG)		●	●
Energy Saving System (HW-ESS)		●	●
Tool Monitoring (HW-TM)		○	○
Thermal Displacement Compensation (HW-TDC)		○	○
DNC software (HW-eDNC)		○	○
Machine Monitoring System (HW-MMS)		○	○
Conversational program	SmartGuide-i	●	●
	HW-DPRO	○	○
ETC			
Tool Box		●	●
Customized Color	Need Munsel No.	☆	☆
CAD & CAM		☆	☆
Safety Device			
Total Splash Guard		●	●


SPECIFICATIONS

Spindle Output/Torque Diagram

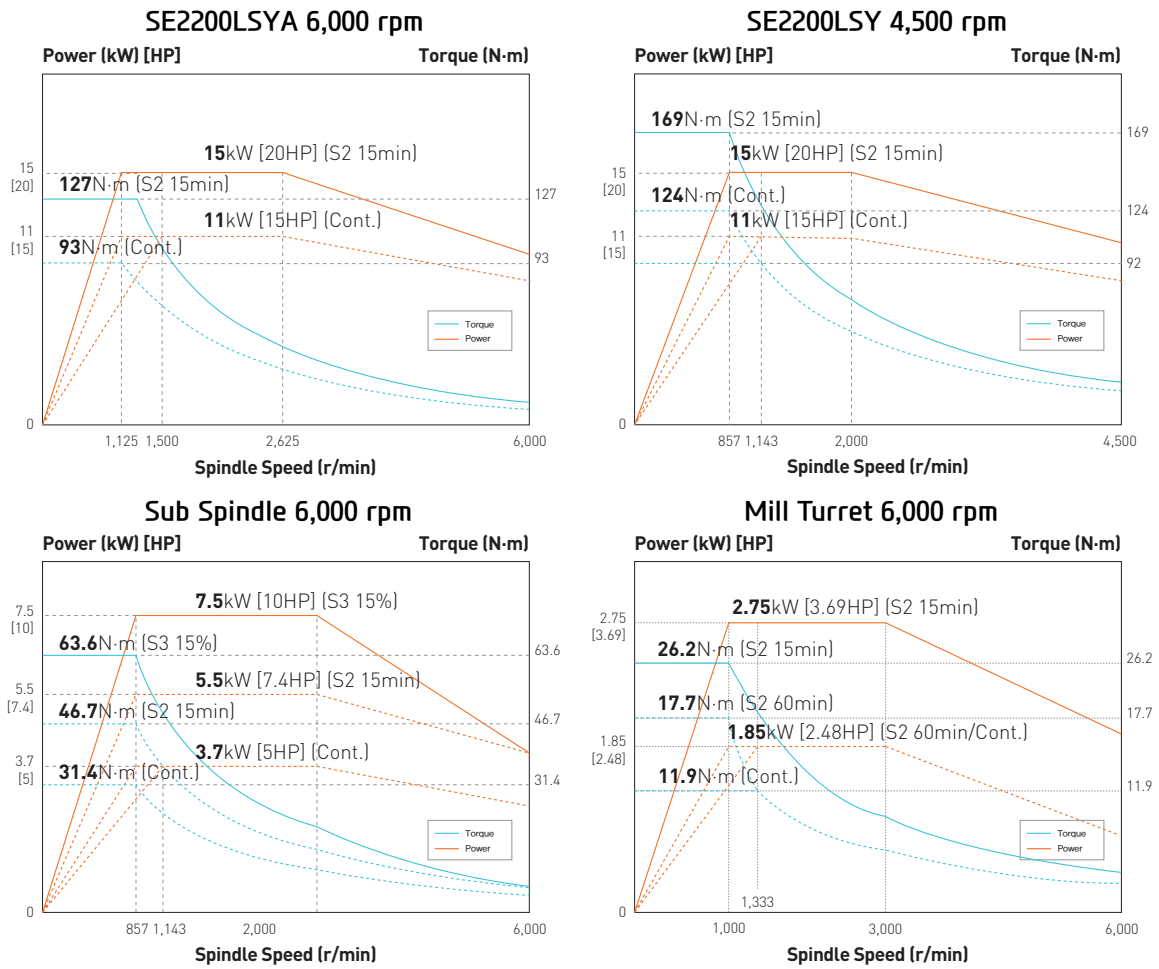

External Dimensions


unit : mm(in)

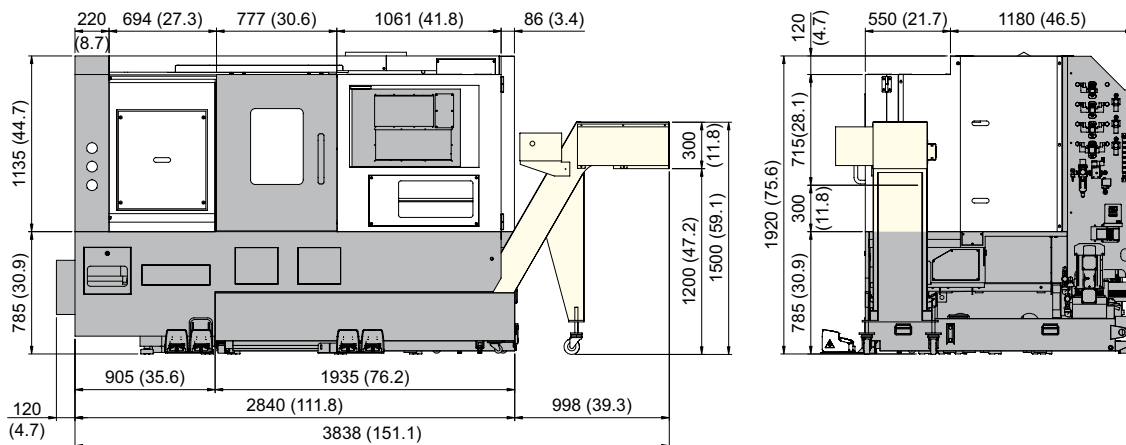

SPECIFICATIONS


Interference

unit : mm(in)

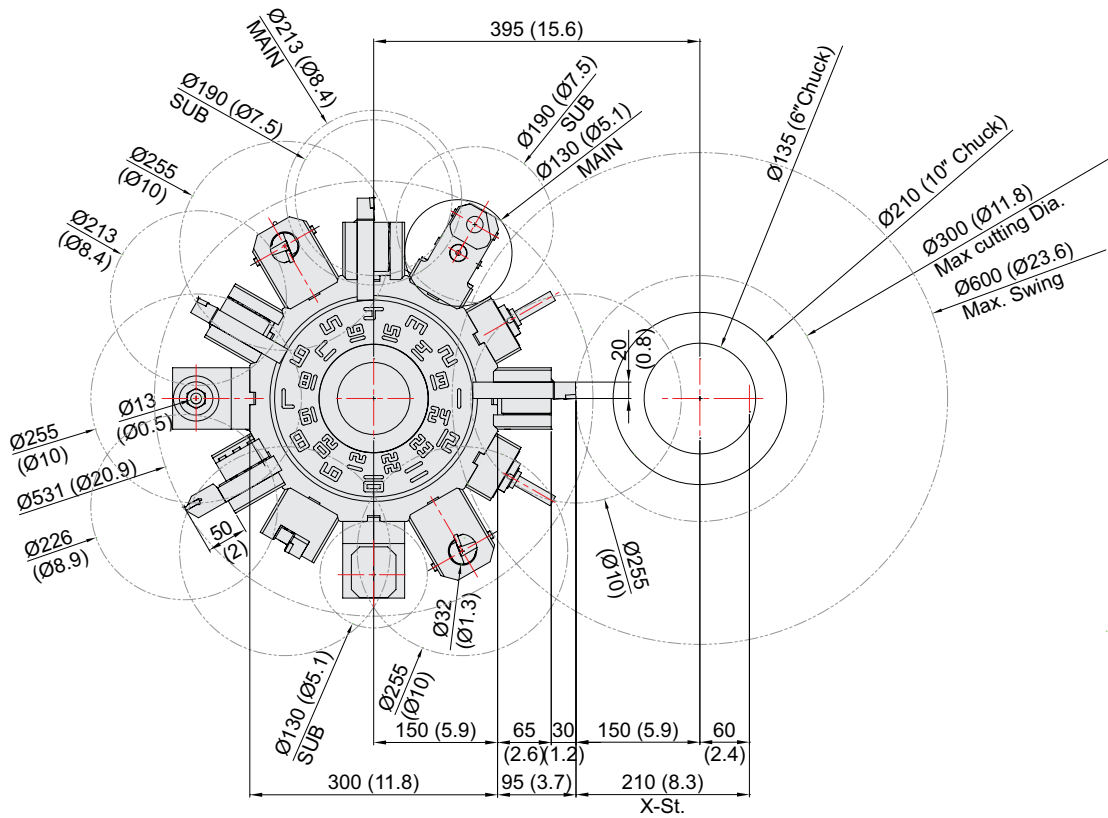

Y-axis Travel Range


unit : mm(in)

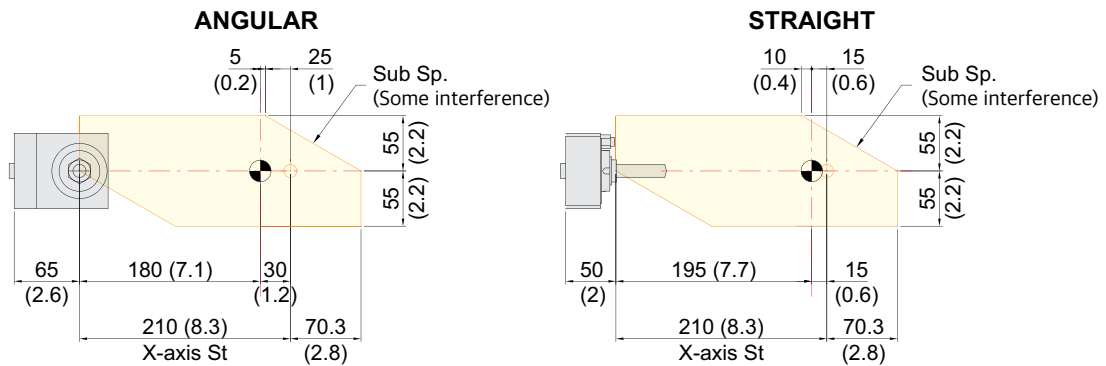

SPECIFICATIONS

Tooling System

unit : mm(in)

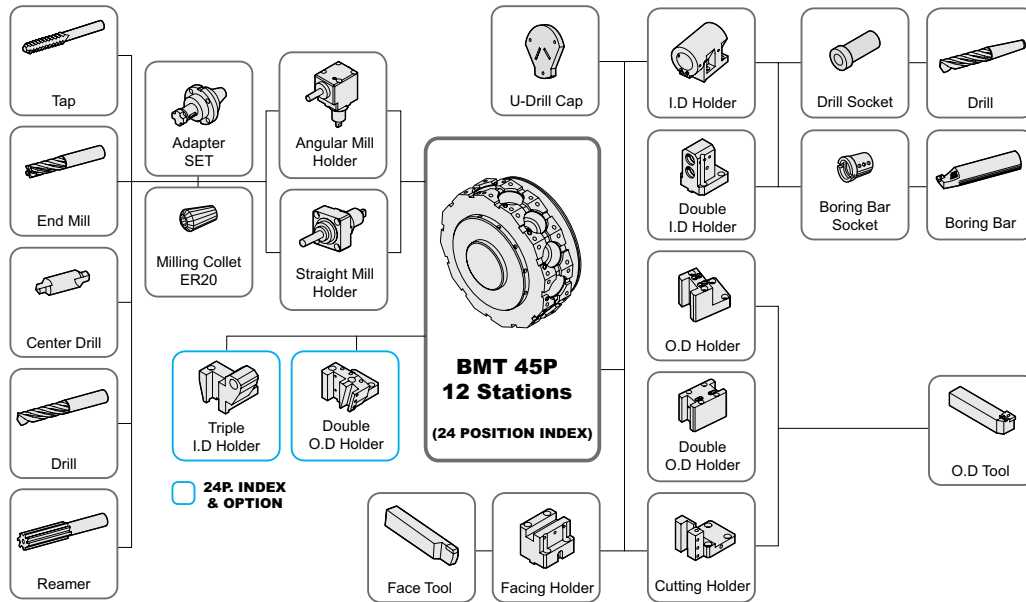

Tooling Parts Detail

ITEM			12 Position		24 Position : Opt.	
			mm Unit	inch Unit	mm Unit	inch Unit
Turning Holder	O.D Holder	Right/Left	2	2	-	-
		Double	1	1	1	1
		Double (24P, Main)	-	-	1	1
		Double (24P, Sub)	-	-	1	1
	Facing Holder	1	1	1	1	
Cutting Holder	1	1	1	1		
Boring Holder	I.D Holder	Single	2	2	1	1
		Double	1	1	1	1
		Triple	-	-	1	1
	U-Drill Holder	Cap	1	1	1	1
Driven Holder	Straight Mill Holder	Standard	2	2	2	2
	Angular Mill Holder	Standard	2	2	2	2
Socket	Boring	Ø10 (Ø3/8")	1	1	1	1
		Ø12 (Ø1/2")	1	1	1	1
		Ø16 (Ø5/8")	1	1	1	1
		Ø20 (Ø3/4")	1	1	1	1
		Ø25 (Ø1")	1	1	1	1
		Ø8 (5/16")	1	1	1	1
	Sub Boring	Ø10 (Ø3/8")	1	1	1	1
		Ø12 (1/2")	1	1	1	1
		Ø16 (5/8")	1	1	1	1
		Drill	MT 1	Opt.	Opt.	Opt.
		MT 2	Opt.	Opt.	Opt.	Opt.
	ER Collet		1 Set	1 Set	1 Set	1 Set
	Adapter Set		Opt.	Opt.	Opt.	Opt.


Specifications are subject to change without notice for improvement.

SPECIFICATIONS


Tooling Travel Range

unit : mm(in)


Straight driven Tool holder

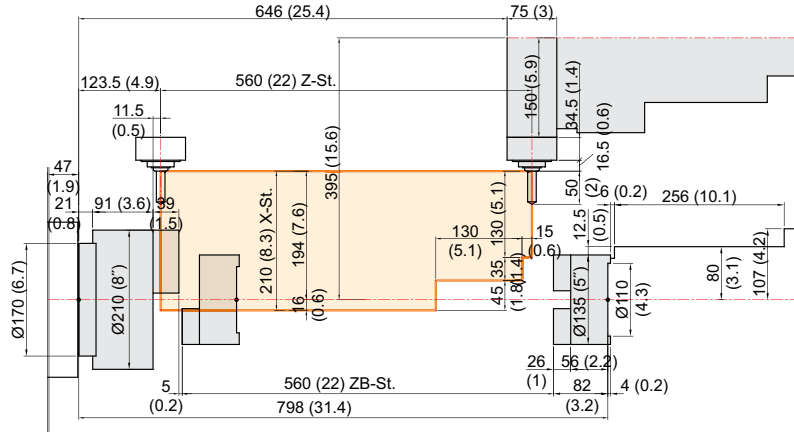

Angular driven Tool holder

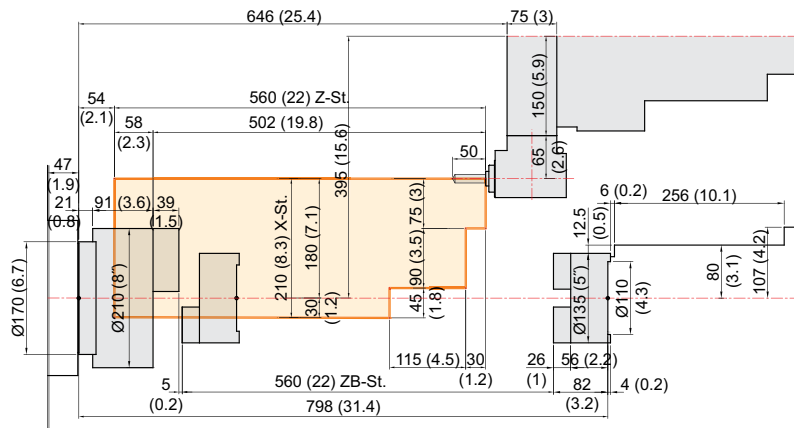

Sub Angular driven Tool holder

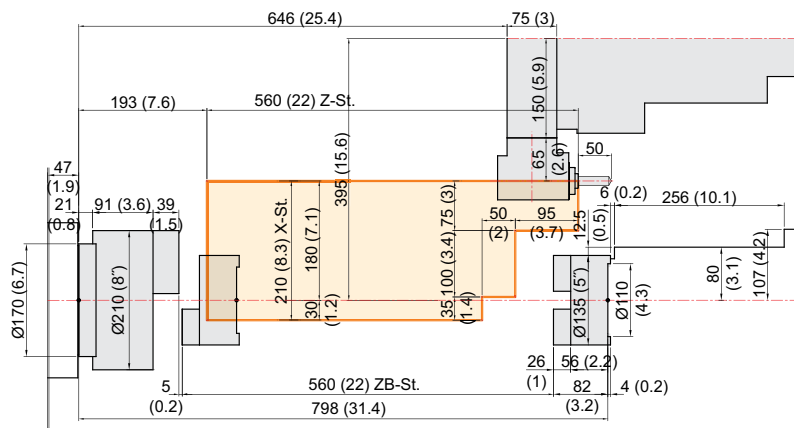

SPECIFICATIONS

Specifications

[] : Option

ITEM			SE2200LSYA	SE2200LSY	
CAPACITY	Swing Over the Bed	mm(in)	Ø600 (Ø23.6")		
	Swing Over the Carriage	mm(in)	Ø600 (Ø23.6")		
	Max. Turning Dia.	mm(in)	Ø300 (Ø11.8")		
	Max. Turning Length	mm(in)	529 (20.8")	508 (20")	
	Bar Capacity	Main	mm(in)	Ø51 (Ø2")	Ø65 (Ø2.6")
Sub		mm(in)	Ø32 (Ø1.3")		
SPINDLE	Chuck Size	Main	inch	6"	8"
		Sub	inch	5"	
	Spindle Bore	Main	mm(in)	Ø75 (Ø3")	
		Sub	mm(in)	Ø42 (Ø1.7")	
	Spindle Speed (rpm)	Main	r/min	6,000	4,500
		Sub	r/min	6,000	
	Motor (Max/Cont.)	Main	kW(HP)	15/11 (20/15)	
		Sub	kW(HP)	7.5/3.7 (10/5)	
	Torque (Max/Cont.)	Main	N·m	127/93	169/124
		Sub	N·m	63.6/31.4	
Spindle Type	Main	-	BELT		
	Sub	-	BELT		
Spindle Nose	Main	-	A2-5	A2-6	
	Sub	mm(in)	FLAT TYPE		
C-axis Indexing	deg	0.001°			
FEED	Travel	X/Y	mm(in)	210/110 {±55} (8.3"/4.3" {±2.2"})	
		Z/ZB	mm(in)	560/560 (22"/22")	
	Rapid Traverse Rate	X/Y	m/min(ipm)	30/10 (1,181/394)	
		Z/ZB	m/min(ipm)	36/15 (1,417/591)	
Slide Type	-	ROLLER LM GUIDE			
TURRET	No. of Tools	ea	12 [24]		
	Tool Size	O.D	mm(in)	□ 20 (□ 3/4")	
		I.D	mm(in)	Ø32 (Ø1 1/4")	
	Indexing Time	sec	0.11		
Y-Axis Type	-	WEDGE TYPE			
LIVE TOOL	Milling Tool Speed (rpm)	r/min	6,000		
	Motor (Max/Cont.)	kW(HP)	2.8/1.9 (3.8/2.5)		
	Torque (Max/Cont.)	N·m	26.2/11.9		
	Collet Size	mm(in)	Ø13 (Ø0.5") {ER20}		
	Type	-	BMT45P		
TANK CAPACITY	Coolant Tank	ℓ (gal)	200 (52.8)		
	Lubricating Tank	ℓ (gal)	0.7 (0.2)		
POWER SUPPLY	Electric Power Supply	kVA	23		
	Thickness of Power Cable	Sq	Over 16		
	Voltage	V/Hz	220/60 (200/50*)		
MACHINE	Floor Space (L×W)	mm(in)	2,960×1,730 (116.5"×68.1")		
	Height	mm(in)	1,920 (75.6")		
	Weight	kg(lb)	4,200 (9,259)		
CNC	Controller	-	HYUNDAI WIA FANUC – SMART PLUS		

*) Using 50Hz voltage instead of 60Hz may lower the output of motors. (excluding servo motors and inverter motors)
Specifications are subject to change without notice for improvement.

CONTROLLER

HYUNDAI WIA FANUC – SMART PLUS

[] : Option

Controlled axis / Display / Accuracy Compensation	
Control axes	2 axes (X, Z) / 3 axes (X, Z, C) / 4 axes (X,Z,Y,C) 5 axes (X, Z, B, C, A) / 6 axes (X, Z, Y, B, C, A) 7 axes (X1/Z1, X2/Z2, B2, C1/C2)
Simultaneously controlled axes	2 axes [Max. 4 axes]
Designation of spindle axes	3 axes [Max. 4 axes]
Least setting Unit	X, Z, Y, B axes : 0.001 mm (0.0001 inch) C, A axes : 0.001 deg
Least input increment	X, Z, Y, B axes : 0.001 mm (0.0001 inch) C, A axes : 0.001 deg
Inch / Metric conversion	G20 / G21
High response vector control	
Interlock	All axes / Each axis
Machine lock	All axes
Backlash compensation	± 0~9999 pulses (exc. Rapid traverse / Cutting feed)
Position switch	
LCD / MDI	15 inch LCD unit (with Touch Panel)
Feedback	Absolute motor feedback
Stored stroke check 1	Over travel
Stored stroke check 2, 3	
PMC axis control	
Operation	
Automatic operation (Memory)	
MDI operation	
DNC operation	Needed DNC software / CF card
Program restart	
Wrong operation prevention	
Program check function	Dry run
Single block	
Search function	Program Number / Sequence Number
Interpolation functions	
Nano interpolation	
Positioning	G00
Linear interpolation	G01
Circular interpolation	G02, G03
Exact stop mode	Single : G09, Continuous : G61
Dwell	G04, 0 ~ 9999.9999 sec
Skip	G31
Reference position return	1st reference : G28, 2nd reference : G30 Ref. position check : G27
Thread synchronous cutting	G33
Thread cutting retract	
Variable lead thread cutting	
Multi / Continuous threading	
Feed function / Acc. & Dec. control	
Manual feed	Rapid traverse Jog : 0~2,000 mm/min (79 ipm) Manual handle : x1, x10, x100 pulses Reference position return
Cutting Feed command	Direct input F code
Feedrate override	0 ~ 200% (10% Unit)
Rapid traverse override	1%, F25%, 50%, 100%
Override cancel	
Feed per minute	G98
Feed per revolution	G99
Look-ahead block	1 block
Program input	
Tape Code	EIA / ISO
Optional block skip	1 ea
Absolute / Incremental program	G90 / G91
Program stop / end	M00, M01 / M02, M30
Maximum command unit	± 999,999.999 mm (± 99,999.9999 inch)
Plane selection	X-Y : G17 / Z-X : G18 / Y-Z : G19
Workpiece coordinate system	G52, G53, 6 pairs (G54 ~ G59)
Manual absolute	Fixed ON
Programmable data input	G10
Sub program call	10 folds nested
Custom macro	#100 ~ #199, #500 ~ #999
G code system	A, B/C
Programmable mirror image	G51.1, G50.1
G code preventing buffering	G4.1
Direct drawing dimension program	Including Chamfering / Corner R
Conversational Program	SmartGuide-i


Program input	
Multiple repetitive cycles	I, II
Canned cycle for turning	
Auxiliary function / Spindle speed function	
Auxiliary function	M & 4 digit
Level-up M Code	High speed / Multi / Bypass M code
Spindle speed function	S & 5 digit, Binary output
Spindle override	0% ~ 150% (10% Unit)
Multi position spindle orientation	M19 (S##)
FSSB Rigid tapping	
Constant surface speed control	G96, G97
Tool function / Tool compensation	
Tool function	T & 2 digit + Offset 2 digit
Tool life management	
Tool offset pairs	128 pairs
Tool nose radius compensation	G40, G41, G42
Geometry / Wear compensation	
Direct input of offset measured B	
Editing function	
Part program storage size	5,120m (2MB)
No. of registerable programs	1,000 ea
Program protect	
Background editing	
Extended part program editing	Copy, move and change of NC program
Memory card program edit	
Data input / output & Interface	
I/O interface	CF card, USB memory Embedded Ethernet interface
Screen hard copy	
External message	
External key input	
External workpiece number search	
Automatic data backup	
Setting, display and diagnosis	
Self-diagnosis function	
History display & Operation	Alarm & Operator message & Operation
Run hour / Parts count display	
Maintenance information	
Actual cutting feedrate display	
Display of spindle speed / T code	
Graphic display	
Operating monitor screen	Spindle / Servo load etc.
Power consumption monitoring	Spindle & Servo
Spindle / Servo setting screen	
Multi language display	Support 24 languages
Display language switching	Selection of 5 optional Languages
LCD Screen Saver	Screen saver
Unexpected disturbance torque	BST (Back spin torque limit)
Function for machine type	
Cs contour control (C & A axes)	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY
Polar coordinate interpolation	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY
Cylindrical interpolation	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY
Polygon turning (2 Spindles)	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY
Canned cycle for drilling	Mill, MS, Y, SY, LF-Mill, TTMS, TTSY
Spindle orientation expansion	MS, SY, TTS, TTMS, TTSY
Spindle synchronous control	MS, SY, TTS, TTMS, TTSY
Torque control	MS, SY, TTS, TTMS, TTSY
Y axis offset	Y, SY, TTSY
Arbitrary angular control	Y, SY, TTSY
Composite / Superimposed control	MS, SY, TTS, TTMS, TTSY
Balance cutting	TTS, TTMS, TTSY
Option	
Additional optional block skip	9 ea
Fast ethernet	Needed option board
Data server	Needed option board
Protection of data at 8 levels	
Tool offset pairs	200 pairs
Helical interpolation	
Optional block skip	40 ea, 200 ea (AICC II)

Figures in inch are converted from metric values.

The FANUC controller specifications are subject to change based on the policy of company CNC supplying.

09 GLOBAL NETWORK

HYUNDAI WIA opens a new era in the machinery industry.
Reborn as a global leader.

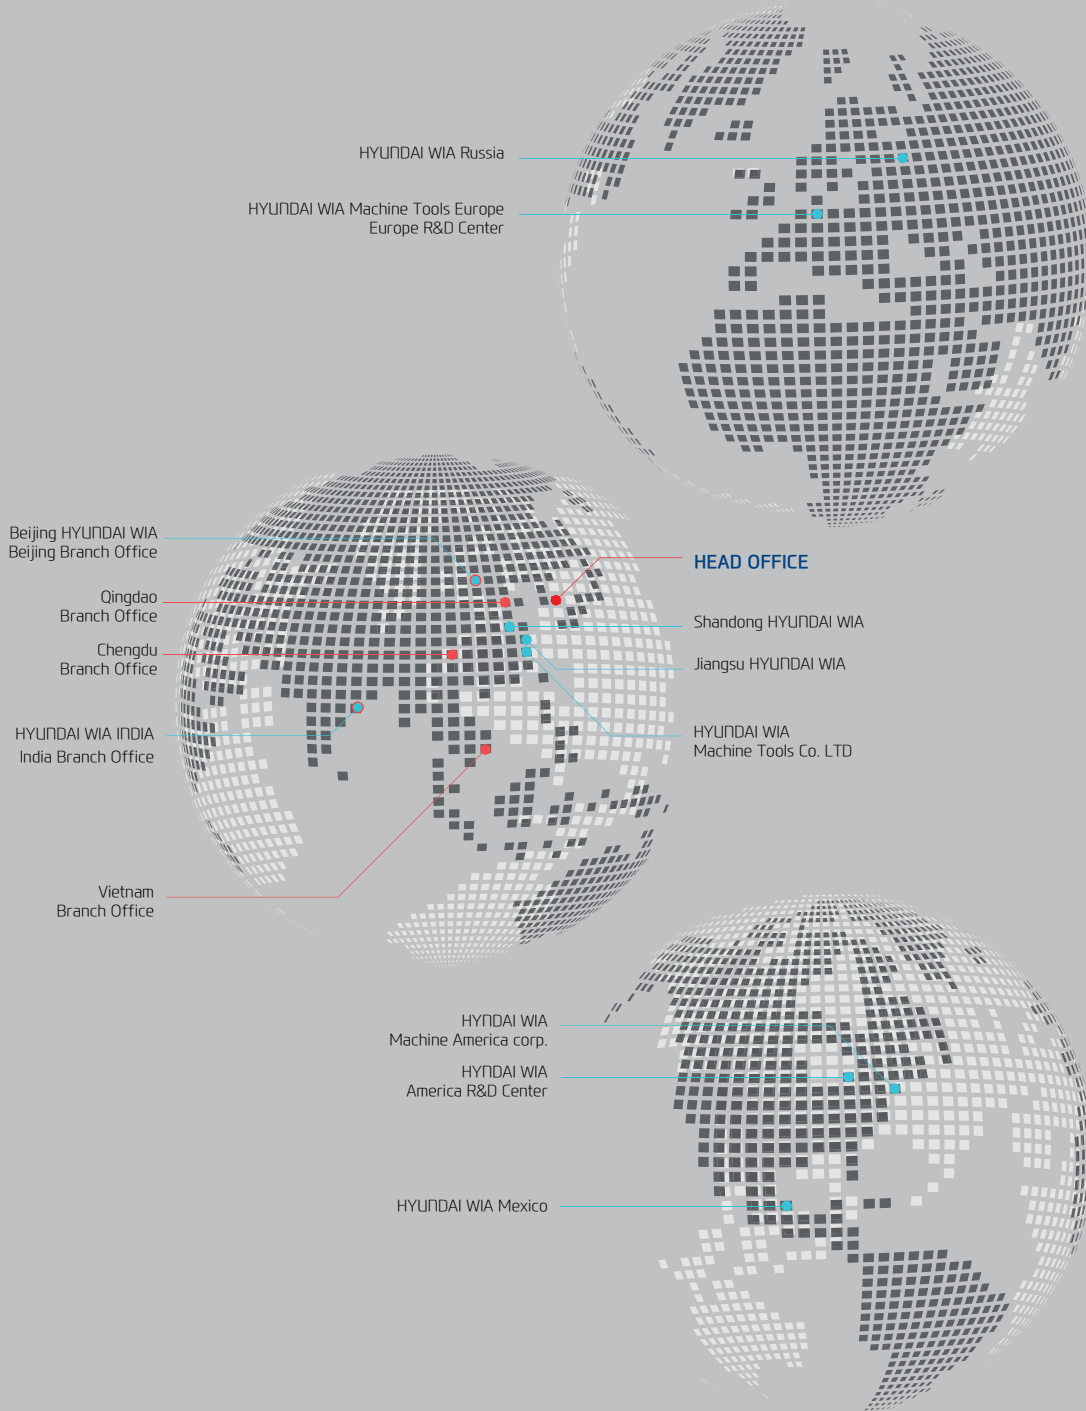

GLOBAL NETWORK



HEADQUARTER

Changwon Technical Center/R&D Center/Factory

153, Jeongdong-ro, Seongsan-gu, Changwon-si, Gyeongsangnam-do, Korea
(Zip Code : 51533) TEL : +82 55 280 9114 FAX : +82 55 282 9680

Uiwang Technical Center/R&D Center

37, Cheoldobangmulgwan-ro, Uiwang-si, Gyeonggi-do, Korea
(Zip Code : 16082) TEL : +82 31 596 8209 FAX : +82 55 210 9804

OVERSEAS OFFICES

EUROPE

HYUNDAI WIA Machine Tools Europe / Europe R&D Center

Alexander-Fleming-Ring 57, 65428 Rüsselsheim Germany
TEL : +49-0-6142-9256-0

HYUNDAI WIA Russia

Russia, 197374, St. Petersburg, Torfyanaya doroga 7,
Business center <Gulliver-2>, Office No. 825

ASIA

Beijing HYUNDAI WIA

No.9, West of Shunxi South Road, Renhe Town, Shunyi District, Beijing, China
TEL : +86-10-6049-6373

Beijing Branch Office

1401, Zhonghangji Plaza B, No. 15 Ronghua South Road, BDA Dist, Daxing Dist,
Beijing, China, 100176
TEL : +86-10-8453-9850

Shandong HYUNDAI WIA

Company No.188 Shanghai Road, Rizhao City, Shandong Province, China
TEL : +86-633-229-9021

Chengdu Branch Office

No.508 Room, B Block, AFC Plaza, No.88 Jiaozui Road, High-tech Zone, Chengdu,
China
TEL : +86-28-8666-4470

Jiangsu HYUNDAI WIA

Company No.6 Fenghuang Road, Fenghuang Town, Zhangjiagang City, Jiangsu
Province, China
TEL : +86-512-5842-2500

Qingdao Branch Office

Room 1207, Caifu Building, 182-6 Haier Middle Road, Qingdao, China
TEL : +86-532-8667-9334

HYUNDAI WIA Machine Tools China

1-3F, Bldg6, No.1535 Hongmei Road, Xuhui District, Shanghai, China
TEL : +86-21-6427-9885

India Branch Office

#4/169, 1st Floor, LOTTE BLDG, Rajiv Gandhi Salai, (OMR), Kandanchavadi, Chennai
- 600096, Tamilnadu, India
TEL : +91-76-0490-1618

HYUNDAI WIA India

48, Sur.No78-80, Kandamangalam Village, Sengadu Post, Sriperumbudur Taluk,
Kancheepuram, Tamil Nadu-602 105, India
TEL : +91-44-2715-9302

Vietnam Branch Office

Flat number 05, Service and Trade Center of Viet Huong Industrial Zone, Highway
13, Thuan Giao, Thuan An, Binh Duong, Vietnam
TEL : +84-3-5399-5099

AMERICA

HYUNDAI WIA Machine America corp.

450 Commerce Blvd, Carlstadt, NJ 07072, USA
TEL : +1-201-987-7298

HYUNDAI WIA America R&D Center

39205 Country Club Drive Suite C-9, Farmington Hills, MI 48331, USA
TEL : +1-248-324-1057

HYUNDAI WIA Mexico

Carretera a Pesquería-Los Ramones KMS 13 al 15 Interior 18 Localidad "La Arena"
Pesquería C.P.66679, Nuevo León México
TEL : +52-1-81-1646-5208

HYUNDAI
WIA

EXPERIENCE THE NEW TECHNOLOGY

With its top-quality HYUNDAI WIA machine tool creates a new and better world.



<http://machine.hyundai-wia.com>

HYUNDAI WIA Machine Tools
Global Links